



## Type KS 15

basic @ level

Conductive one-staff-level probe with welding sleeve system and modular process connection

### Advanced Features

- ▶ Welding sleeve system with modular process connection
- ▶ Aseptic measuring point possible
- ▶ Electrodes free cuttable
- ▶ Wettingparts made of high-grade steel  
Material No. 1.4404
- ▶ FDA, EHEDG-conformal

### Technical features


- ▶ Electrodes blank or coated
- ▶ Optional high-grade-steel connecting head  
Material No. 1.4305
- ▶ Optional deliverable with level module
- ▶ With connecting head optional connections:
  - Screw joint
  - M12 plug
- ▶ Without connecting head optional connections:
  - M12 plug
  - hard coded cable
- ▶ Thread G 1/2 " elastomerfree sealing system
- ▶ Safety class IP69K
- ▶ CiP/SiP Cleaning 140°C, 30 min.
- ▶ ambient temperature: -10...60°C
- ▶ permissible media temperature: 0...100°C
- ▶ staff length 2mtr. max.



### Favoured fields of application are e.g.:

- ▶ Low- / high alarm in containers
- ▶ Media registration in pipes as pump protection
- ▶ Container filling / deflation with level control

### M12 Plug

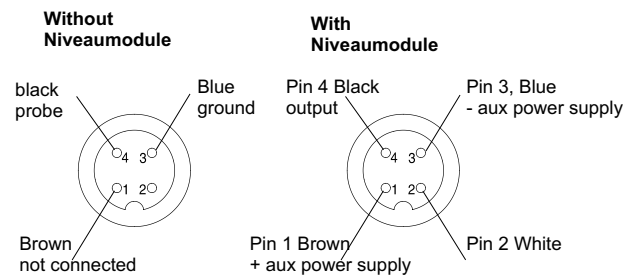

### Order Code

KS 15

High-grade steel connecting head				
With connecting head and with screw joint	0	5		
With connecting head and with M12-plug	0	6		
Without connecting head with M12-plug	1	1		
Without connecting head with hard coded cable (X = Length in Metres, standard 2 mtr.)	1	X		
Probe length				
probe length (X = length in mm)			X	
Preference type			200	
Preference type			500	
Preference type			1000	
Type of electrode				
blank staff				A
coated staff				B
Level modul				
optional with integrated level modul				SNKM